



With all the standard and optional features, it is no doubt that there is always one model that can be of your choice.

Product Range

CODE	GROSS VOLUME(L)	SAFE FILL LEVEL(L)	EXTERNAL DIMENSIONS (L/W/H)(MM)	TARE WEIGHT (KG)
KPF500	500	450	1412*1022*761	430
KPF1000	1000	900	1622*1022*1120	660
KPF1500	1500	1400	2214*1022*1120	880
KPF2000	2000	1800	2240*1178*1277	1050
KPF2500	2500	2300	2240*1428*1277	1240
KPF3000	3000	2800	2240*1678*1277	1360
KPF4500	4500	4200	2206*1752*1703	1550
KPF5000	5000	4700	2656*2230*1277	2250
KPF6500	6500	6100	2650*2230*1653	2500

Fuzhou Gff Keypower Equipment Co., Ltd.
Keypower Solutions (Fujian) Co.,Ltd.

Add: No. 3-1, Dongling RD, Ganzhe Street, Minhou County, Fuzhou, Fujian, China
Tel: (86-591) 8340 5668 Fax: (86-591) 3820 7503
Enquiry: lily@keypower.com sales@keypower.com
Website: www.keypower.com www.loadbank.com

V2023.05



KEY POWER Fuel Tank | Series

- * Bespoke type available
- * Applicable for different site condition
- * Reliability and stability sustainable






The fuel tank by keyower whether it is banded or single layer is constructed to Australian standard that can fit into all industry which requires external fuel tank especially for the mining industry.

Sturdy | Fuel Tank Series

Sturdy, Practical and Convenient

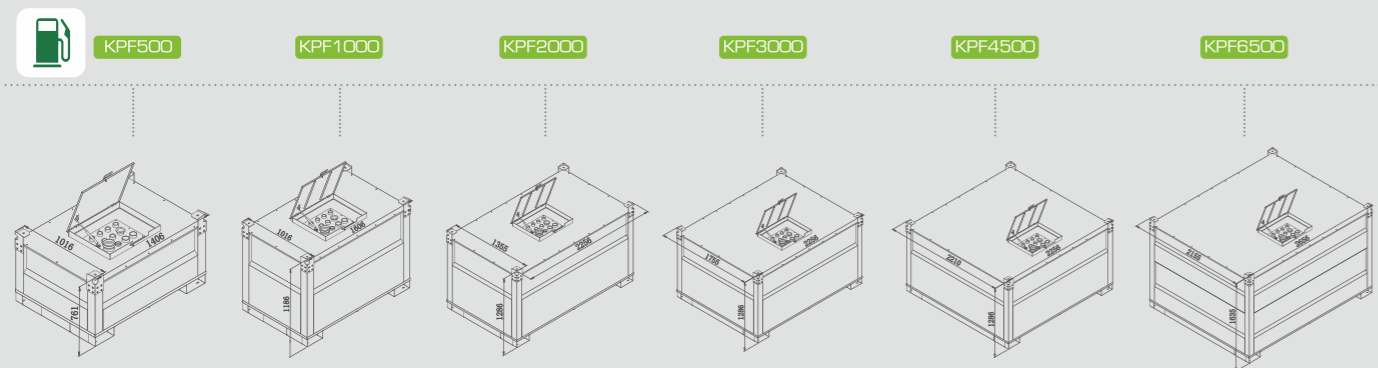

Advantages

Optional


- Automatic fuel refilling system with electronic fuel sensor (power requirement 220V) and the respective hoses and connector
- GPS system (need power of 12V)
- Fuel leakage alarm (need power of 12V)
- Pumps, connection and hoses are housed and can be locked within the bund even in operation

QUALITY SAFETY
5 YEARS
STRUCTURAL
GUARANTEE



Tank Standard Features

- In accordance with Australian standard AS1940 / AS1692
- Standard steel plate
- Can be double decked
- 5 Years structural guarantee
- Pressure tested inner tank
- Removable inner fuel tank
- Banded fuel tank painted with anti corrosive marine paint
- All the external bolts are using stainless steel 304
- The outer tank can hold 110% of the inner tank's capacity
- With analogue fuel gauge
- Emergency breather
- 3" intelligent fuel refilling port with fuel hose and lock + dust filter cover
- With 2 x 1.5" and 2 x 2" air suction port
- With 4 x 1.5" fuel return port
- Labeling
- Suitable for the storage of diesel, petrol, waste oil, lubricants and all other liquid form
- With fully certified lifting lugs and forklift pockets
- Lockable hatch
- Inner baffle plates for safety transport.



KEYPOWER®

Professional Power Energy Solution Provider